

REF.	ID.	PIN NO.	SIGNAL	WIRE COLOR	GAUGE	CONNECTOR TYPE	CABLE LENGTH
		1	+3.3VDC	ORANGE	18		$520 {+30 \atop -10}$
		2	+3.3VDC	ORANGE	18	MOLEX	
		3	СОМ	BLACK	18		
		4	+5VDC	RED	18	2240	mm
Ъ1		5	СОМ	BLACK	18	or EQUIV.	
		6	+5VDC	RED	18		
		7	СОМ	BLACK	18		
		8	PW-OK	GRAY	24		
		9	+5Vsb	PURPLE	18		
		10	+12V2	YELLOW	18		
	1	11	+12V2	YELLOW	18		
		12	+3.3VDC	ORANGE	18		
		13	+3.3VDC	ORANGE	18		
Ŧ			+3.3V sence	BROWN	24		
		14	-12VDC	BLUE	24		
		15	СОМ	BLACK	18		
		16	PS-ON	GREEN	24		
		17	COM	BLACK	18		
		18	COM	BLACK	18		
		19	COM	BLACK			
		20			10		
		21	+5VDC	RED	18		
		22	+5VDC	RED	18		
		23	+5VDC	RED			
		24	COM	BLACK			
		1	+12V2	YELLOW			
	٨	2	COM	BLACK	18	AMP 1-480424-0 or EQIV.	150 + 30 - 10
$\mathbf{P}$	At	3	COM	BLACK	18		
		4	+5V	RED	18		mm
		1	+12V2	YELLOW	20	$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	
T T		2	СОМ	BLACK	20		180 + 30
Ρ	Ы	3	СОМ	BLACK	20		-10
		4	+5V	RED	20		mm
		1	COM	BLACK	18	ΜΟΙ ΈΥ	mm 180 + 30 - 10 mm 480 + 30 - 10
	$\frown$	2	СОМ	BLACK	18		480 + 30
$\mathbb{P}$		3	+12V1	Yel/Black			-10
		4		Yel/Black		or EQUIV.	mm
PI		1	+12V2	YÉLLOW	18	CL1271HS0 -15P	$175 + 30 \\ -10$
	D	2	СОМ	BLACK	18		
		3	+5V	RED	18		
		4	СОМ	BLACK	18	101	
		5	+3.3VDC	ORANGE	18		
PE	E	1	+12V2	YELLOW	18	CL1270H00 -15P	
		2	СОМ	BLACK	18		340 + 30
		3	+5V	RED	18		$240 {+30 \atop -10}$
		4	СОМ	BLACK	18		
		5	+3.3VDC	ORANGE	18		****
							~~~-10 mm

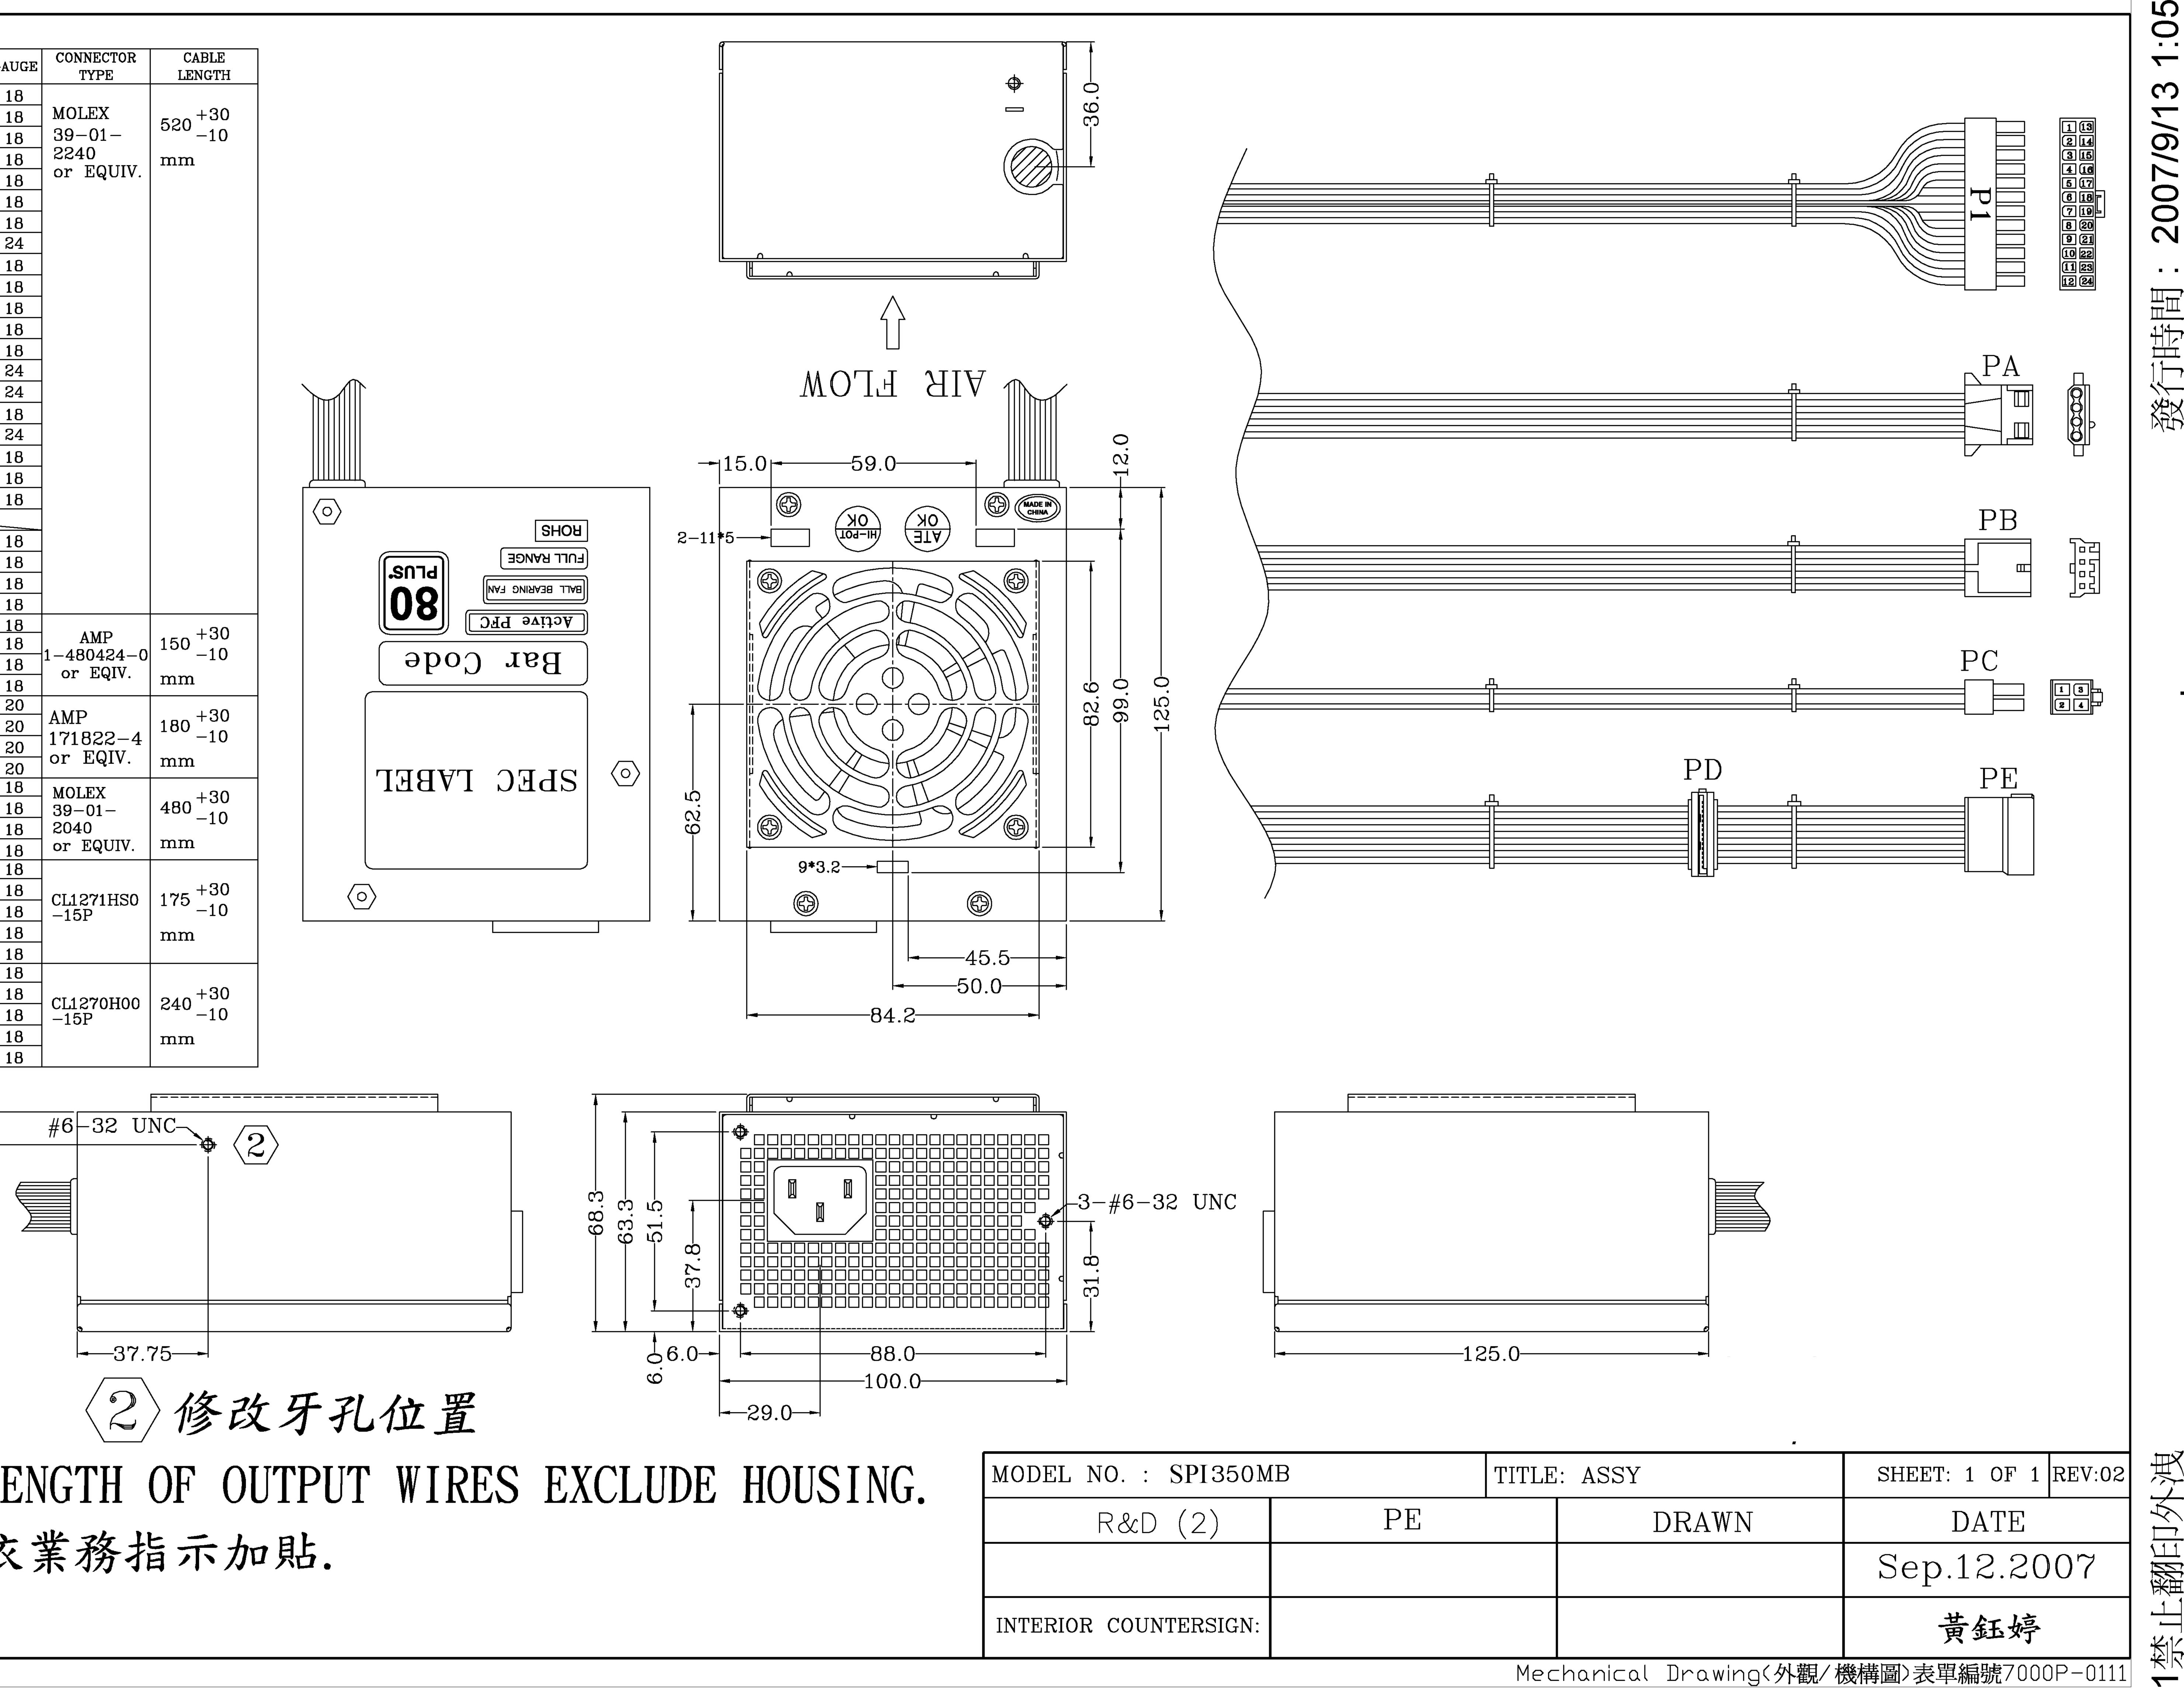

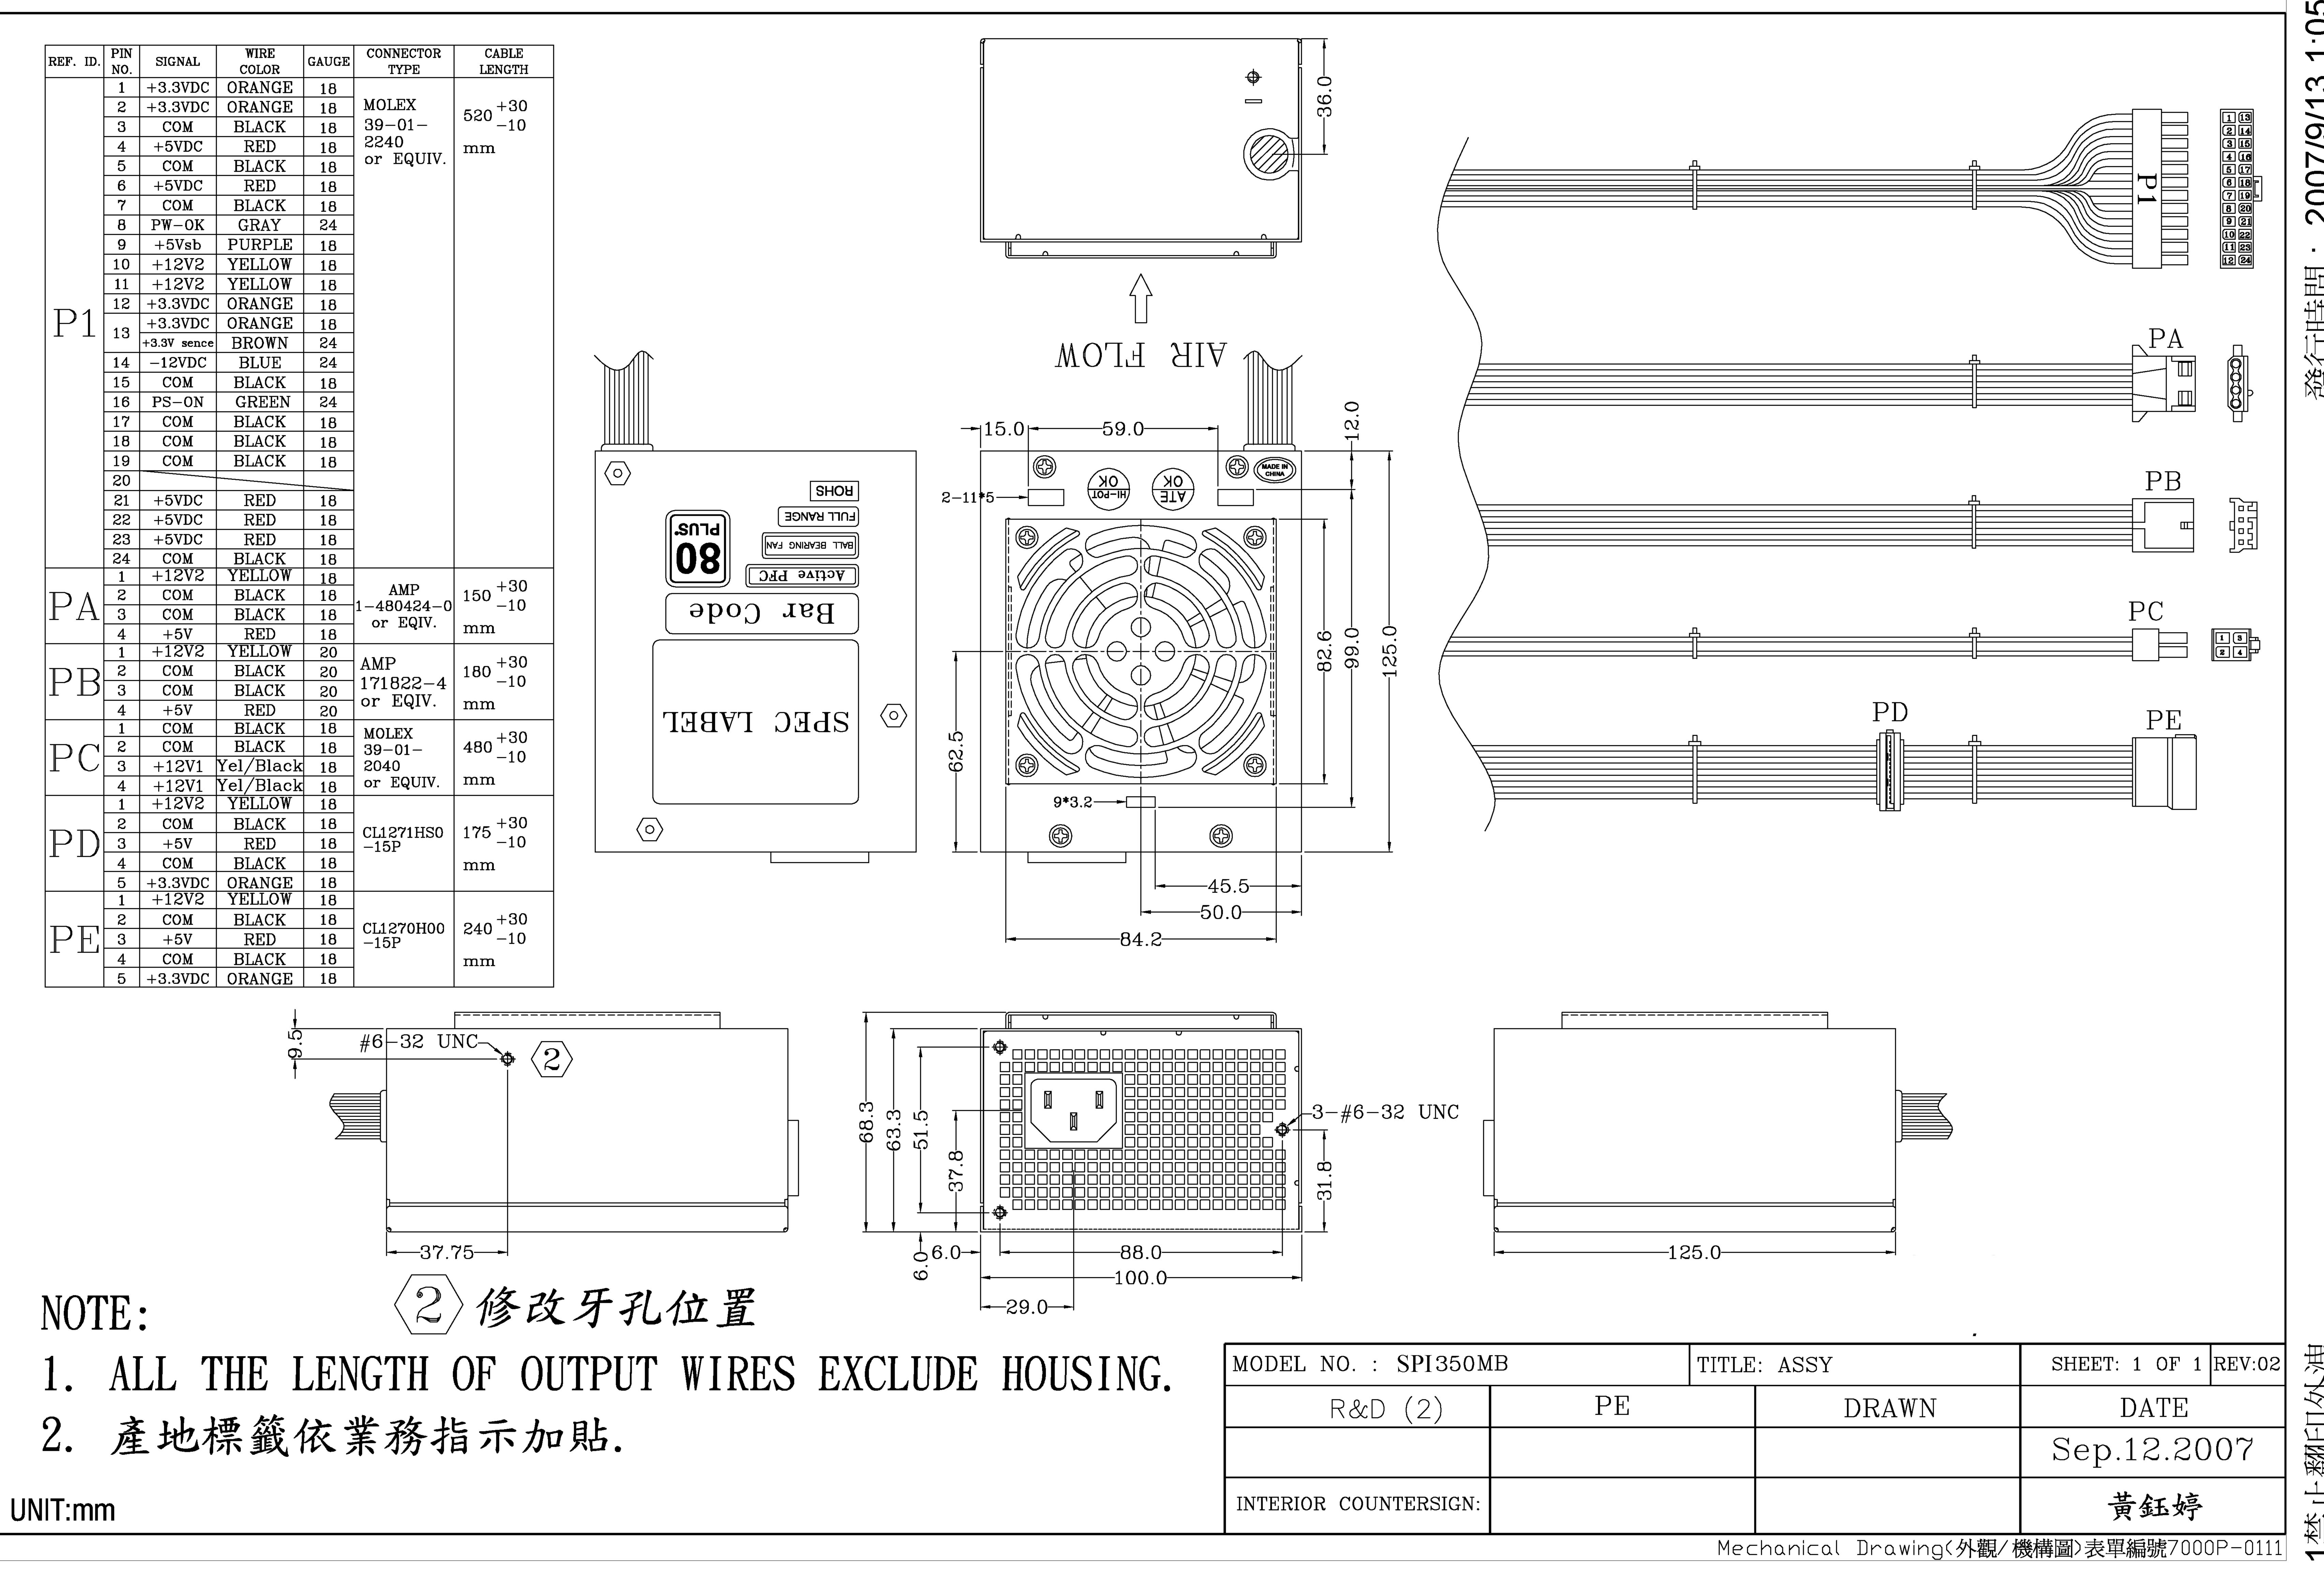

J.	MODEL NO. : SPI350M	[B TI]	ſL
	R&D (2)	PE	
	INTERIOR COUNTERSIGN:		
			7

が大